

# HOGUE®

## INSTALLATION INSTRUCTIONS FOR RUBBER AR MONOGRIP®



### HOGUE, INC.

Post Office Box 91360  
Henderson, NV 89009

1-800-438-4747

Hogueinc.com

### IMPORTANT CONSUMER AND WARRANTY INFORMATION ON BACK OF PACKAGE

ord\_ins\_argrip\_05022017

The following instructions are appropriate for all Hogue rubber AR grips (photos shown using the beavertail model.)

1. Before starting to work, **MAKE SURE THE FIREARM IS UNLOADED.** Remove existing grip. **CAUTION:** Selector spring and selector detent may release from firearm upon grip removal. Do not lose these small parts!

2. Slip grip onto appropriate position on the firearm.

3. Some rifle models will have a gap between the base of the trigger guard and the grip. Confirm the base of your trigger guard:

If there is no gap (see Figure 1), and the grip tongue overlaps the trigger guard base, proceed to Step 4.

If there is a gap (see Figure 2), and the grip tongue covers it, proceed to Step 5.

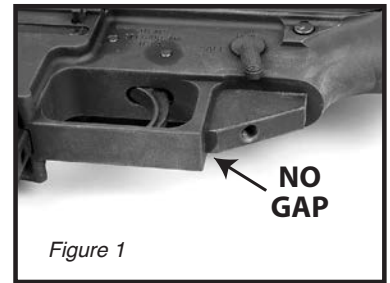


Figure 1


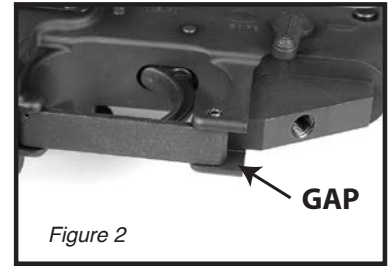


Figure 2

4. If the grip tongue overlaps the base of the trigger guard then it must be cleanly removed. Using a utility blade, **CAREFULLY** cut rubber tongue off grip (See Figure 3.)

6. Using the appropriate tool, tighten grip onto rifle.

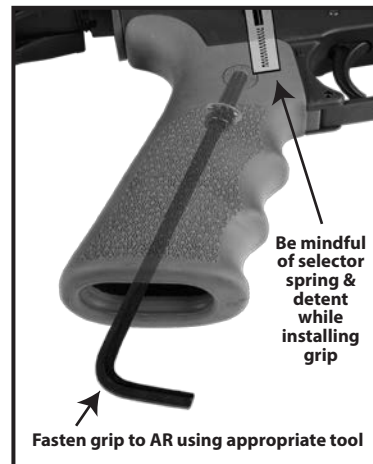

Fasten grip to AR using appropriate tool

### IMPORTANT!

Check all functions of your firearm after grips are installed. **Test-fire your firearm.** This is especially important if weapon is to be used for law enforcement duty.



Figure 3

5. Snugly fit grip into position on rifle. **CAUTION:** If necessary, carefully reinsert selector spring and selector detent. Ensure proper fit in both the grip and the rifle to prevent damage to spring (See Figure 4.)

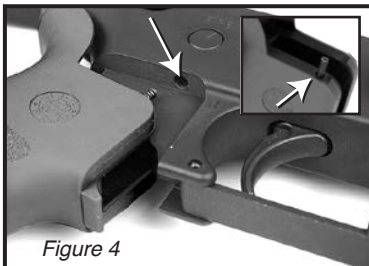


Figure 4

### A FEW WORDS ABOUT FIT

It is a fact that firearm receiver dimensions vary from firearm to firearm. No grip is shipped unless it fits and functions on **our** guns properly. Please keep this in mind.

It is imperative to make sure that every firearm functions properly with after-market grips installed. Although the grip functions properly on our firearms, it is the user's responsibility to check all functions of a firearm after new grips are installed. This is especially important if the weapon is to be used for law enforcement duty. If you do not feel competent to check the proper function yourself, we suggest visiting your gunsmith to check this for you.

**It is important to test-fire a rifle fitted with new grips before using it in the field.**