




Installation Instructions for NAA's Holster Grip for NAA LR Mini-Revolvers

Steps to install:

1. Remove old grips from gun
2. Insert frame panel (NAA-HG11L) on the left side of the gun frame.
3. Insert frame panel (NAA-HG11R) on the right side of the gun frame.
4. Insert spring (NAA-HG14) into detente cap (NAA-HG15). Insert this assembly (spring first) into large hole in frame panel (NAA-HG11L)
5. Depress detente cap with thumb and insert gun frame, heel first, into large end of the Holster Grip. Maneuver until detente cap snaps into place under release button.
6. Maneuver gun frame to align hole on axle support.
7. Insert axle screw in clockwise direction, seat with light pressure

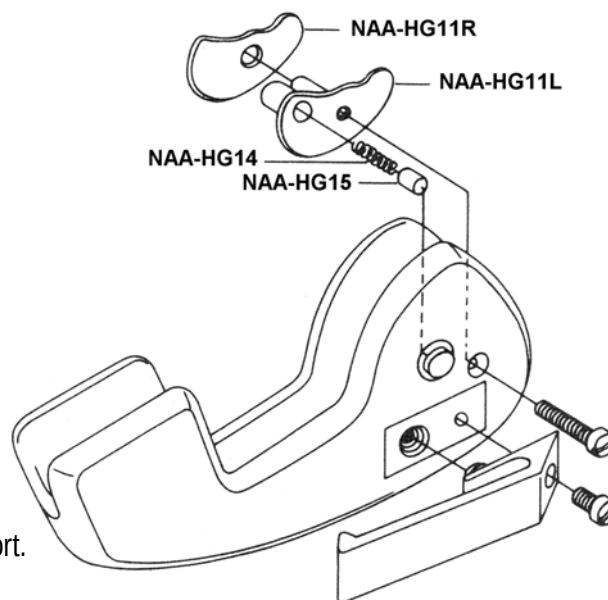

NOTE: Do not over tighten screws!
Over tightening will not tighten grip hold on gun frame,
but will result in thread damage to the Holster Grip!

North American Arms, Inc.
2150 South 950 East
Provo, UT 84606-6285
(801) 374-9990 or (800) 821-5783