

## 8.5 DS

MSRP: \$1,079.99



If you're looking for that one perfect go-anywhere bike, Dual Sport is it—equally adept on road or off.

**Colors** Matte Black Titanite/Matte Lava Black

**Frame** Alpha Gold Aluminum

**Front suspension** SR Suntour NRX, preload adjustable w/remote lockout, alloy steerer, 63mm travel

**Sizes** 15.5, 17.5, 19, 21, 22.5"

**Wheels** Shimano center lock disc hubs; Bontrager Nebula disc 32-hole rims

**Tires** Bontrager LT3, 700x38c

**Shifters** Shimano M590 Deore, 9-speed trigger

**Front derailleur** Shimano Deore

**Rear derailleur** Shimano SLX Shadow

**Crank** Shimano M443 Octalink, 48/36/26

**Cassette** SRAM PG-950 11-32, 9 speed

**Pedals** Wellgo alloy body w/alloy cage

**Saddle** Bontrager Evoke 1

**Seatpost** Bontrager SSR

**Handlebar** Bontrager Race OS Riser, 25mm rise

**Stem** Bontrager SSR, OS, 10 degree

**Headset** Semi-integrated, semi-cartridge bearings, sealed

**Brakeset** Shimano M446 hydraulic disc brakes w/Shimano hydraulic levers

**Grips** Bontrager Satellite Elite, lock-on

[www.trekbikes.com](http://www.trekbikes.com)

## DS Series /

If you're looking for that one perfect go-anywhere bike, Dual Sport is it—equally adept on road or off.

### Upgrades from 8.4 DS

- Shimano SLX/Deore drivetrain
- Remote suspension lockout
- Shimano hydraulic disc brakes
- Shimano Octalink crank


Find a retailer

Compare


Read reviews



Alpha Aluminum frame




Rack & fender ready

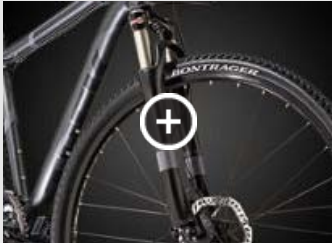

Suspension fork



Suspension lockout



Remote lockout



Hydraulic disc brakes



27 speeds



Gary Fisher Collection

Details /

|                  |                                                                                 |
|------------------|---------------------------------------------------------------------------------|
| Colors           | Matte Black Titanite/Matte Lava Black                                           |
| Frame            | Alpha Gold Aluminum                                                             |
| Front suspension | SR Suntour NRX, preload adjustable w/remote lockout, alloy steerer, 63mm travel |
| Sizes            | 15.5, 17.5, 19, 21, 22.5"                                                       |
| Wheels           | Shimano center lock disc hubs; Bontrager Nebula disc 32-hole rims               |
| Tires            | Bontrager LT3, 700x38c                                                          |
| Shifters         | Shimano M590 Deore, 9-speed trigger                                             |
| Front derailleur | Shimano Deore                                                                   |
| Rear derailleur  | Shimano SLX Shadow                                                              |
| Crank            | Shimano M443 Octalink, 48/36/26                                                 |
| Cassette         | SRAM PG-950 11-32, 9 speed                                                      |
| Pedals           | Wellgo alloy body w/alloy cage                                                  |
| Saddle           | Bontrager Evoke 1                                                               |
| Seatpost         | Bontrager SSR                                                                   |
| Handlebar        | Bontrager Race OS Riser, 25mm rise                                              |
| Stem             | Bontrager SSR, OS, 10 degree                                                    |
| Headset          | Semi-integrated, semi-cartridge bearings, sealed                                |
| Brakeset         | Shimano M446 hydraulic disc brakes w/Shimano hydraulic levers                   |
| Grips            | Bontrager Satellite Elite, lock-on                                              |

Printable version ►


Fit & sizing /

Proper bike fit is essential for best performance and comfort. We've included size and geometry measurements below, but they're for general comparison purposes only. To find your perfect fit, visit an authorized Trek retailer, where an expert skilled at sizing will help you find the appropriate bike and size for your individual needs.



**The right fit is everything.**  
Your Trek retailer will help you dial in the perfect fit, to give you the absolute best comfort and performance.

Find a retailer ►

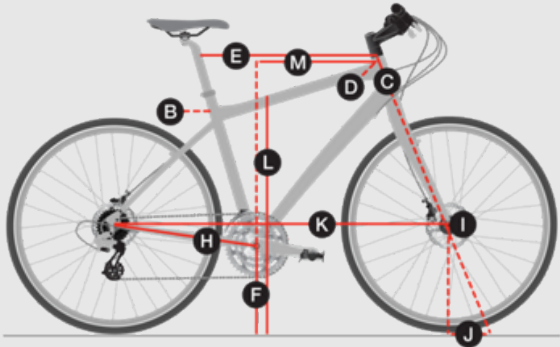

Geometry

Display measurements in Centimeters

|                         | 15 in   | 17.5 in  | 19 in    | 21 in    | 22.5 in |
|-------------------------|---------|----------|----------|----------|---------|
| F Bottom bracket height | 30.9 cm | 30.9 cm  | 30.9 cm  | 30.9 cm  | 30.9 cm |
| H Chainstay length      | 44 cm   | 44 cm    | 44 cm    | 44 cm    | 44 cm   |
| E Effective top tube    | 59 cm   | 60.8 cm  | 62.8 cm  | 64.8 cm  | 66.6 cm |
| D Head angle            | 70.5    | 71       | 71.5     | 71.5     | 71.5    |
| C Head tube length      | 9.5 cm  | 10.5 cm  | 11.5 cm  | 12.5 cm  | 13.5 cm |
| I Offset                | 5.1 cm  | 5.1 cm   | 5.1 cm   | 5.1 cm   | 5.1 cm  |
| B Seat tube angle       | 74      | 74       | 73.5     | 73       | 72.5    |
| L Standover             | 72 cm   | 74.7 cm  | 76.7 cm  | 80.1 cm  | 83.5 cm |
| J Trail                 | 8 cm    | 9 cm     | 9 cm     | 10.5 cm  | 10.5 cm |
| K Wheelbase             | 109 cm  | 110.3 cm | 111.3 cm | 112.8 cm | 114 cm  |


Fit & sizing /

Proper bike fit is essential for best performance and comfort. We've included size and geometry measurements below, but they're for general comparison purposes only. To find your perfect fit, visit an authorized Trek retailer, where an expert skilled at sizing will help you find the appropriate bike and size for your individual needs.



**The right fit is everything.**  
Your Trek retailer will help you dial in the perfect fit, to give you the absolute best comfort and performance.

Find a retailer ►

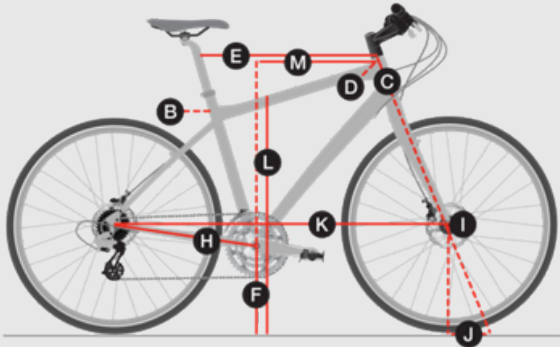

Geometry

Display measurements in Inches

|                         | 15 in   | 17.5 in | 19 in   | 21 in   | 22.5 in |
|-------------------------|---------|---------|---------|---------|---------|
| F Bottom bracket height | 12.2 in | 12.2 in | 12.2 in | 12.2 in | 12.2 in |
| H Chainstay length      | 17.3 in | 17.3 in | 17.3 in | 17.3 in | 17.3 in |
| E Effective top tube    | 23.2 in | 23.9 in | 24.7 in | 25.5 in | 26.2 in |
| D Head angle            | 70.5    | 71      | 71.5    | 71.5    | 71.5    |
| C Head tube length      | 3.7 in  | 4.2 in  | 4.5 in  | 4.9 in  | 5.3 in  |
| I Offset                | 2 in    | 2 in    | 2 in    | 2 in    | 2 in    |
| B Seat tube angle       | 74      | 74      | 73.5    | 73      | 72.5    |
| L Standover             | 28.4 in | 29.4 in | 30.2 in | 31.5 in | 32.9 in |
| J Trail                 | 3.1 in  | 3.5 in  | 3.5 in  | 4.1 in  | 4.1 in  |
| K Wheelbase             | 42.9 in | 43.4 in | 43.8 in | 44.4 in | 44.9 in |